

ECOTECH FR 5%

INTERIOR SCREEN



TECHNICAL SPECIFICATION

Composition	50% Polyester / 50% Trevira CS
Openness Factor	5%
Width	285cm
Pattern	Basketweave 2x2
Fire Classification	FR (USA) - NFPA 701-2010
Weight	205 gr/m ² +/- 5% - ISO 2286-2
Thickness	0.38mm +/- 5%
Breaking Strength	Warp 153 daN/5cm - ISO 1421 Weft 69 daN/5cm - ISO 1421
Tear Strength	Warp 1.9 daN - ISO 4674 Weft 2.5 daN - ISO 4674
Colour Fastness to Light	5-6 - ISO 105:B02
Mould Resistance	A - ISO 846
Greenguard	Gold
Oekotex Standard 100	Class II



ECOTECH FR 5%

INTERIOR SCREEN




Roller



Roman




Panel




130 Cool White



131 White Pearl




171 Machine Grey



160 Steel Grey



091 Warm Charcoal

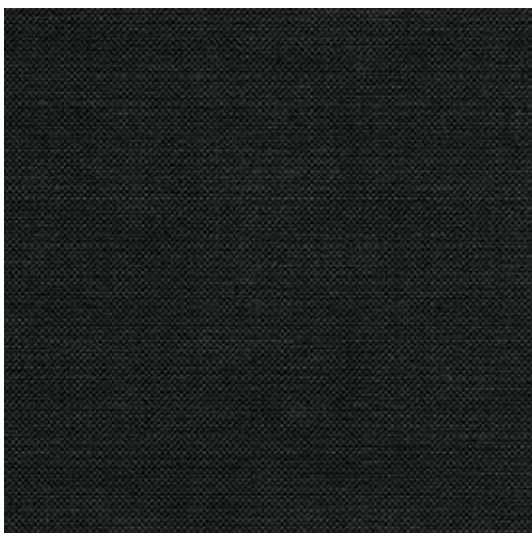

090 Jet Black