


PLATINUM P10

2x2 INTERIOR SUNSCREEN



TECHNICAL SPECIFICATION

Composition	30% Polyester / 70% PVC
Openness Factor	10% (P10)
Width	200cm, 250cm, 300cm
Pattern	Basketweave 2x2
Fire Classification	FR (USA) - NFPA 701-2010 AS1530.3 / B1 (DE) - DIN 4102-1
Yarn Count	Warp 40/inch +/- 5% - ISO 7211.2 Weft 438/inch +/- 5% - ISO 7211.2
Weight	360 gr/m ² +/- 5% - ISO 2286-2
Thickness	0.53mm +/- 5%
Breaking Strength	Warp 87 daN/5cm - ISO 1421 Weft 191 daN/5cm - ISO 1421
Tear Strength	Warp 8.4 daN - ISO 4674 Weft 7.0 daN - ISO 4674
Colour Fastness to Light	8 - ISO 105:B02
Mould Resistance	A - ISO 846
Management Quality System	ISO 9001
Environmental Management System	ISO 14001




PLATINUM P10

2x2 INTERIOR SUNSCREEN




Roller




Vertical



Panel




2066 Super White




2001 White




2081 Casper




2002 White Beige




2004 Beige




2050 White Pearl




2084 Cloud Grey




2003 White Grey




2005 Beige Grey




2006 Grey




2082 Fudge




2080 Caramel




2007 Black Grey



2067 Charcoal Grey

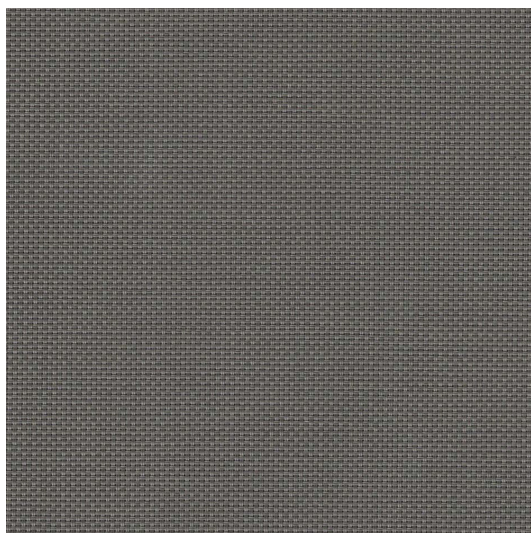


2083 Hammer



2008A Black Copper



2079 Charcoal



2009 Black